

# OmniGrip High Friction Surfacing



Ideal for Tight Radius Corners



Improved Vehicle Deceleration



Reduced Emergency Braking Distances

OMNIGRIP HF is a high friction veneer surfacing system comprised of thermosetting surfacing compound incorporating specialist high polished stone aggregates designed to improve & maintain a high level of skid resistance on asphalt or concrete roads, highway and bridge pavements.

Available in both modified epoxy or polyurethane formulated options OMNIGRIP HF is specifically designed to provide a durable, deep textured and high skid resistant finish for the design life of the product.

## FEATURES

- Improved Surface Friction
- Improved Macro & Micro Texture
- Reduced Braking Distances
- Improved Vehicle Deceleration
- A Safer Road Environment

## APPLICATIONS

- Intersection Treatments
- Roundabouts
- School & Pedestrian Crossings
- Tight Radius Corners
- Black Spot Locations

## PROVEN ROAD SAFETY TECHNOLOGY

- Excellent Friction Properties - SRV > 70
- Reduce Emergency Braking Distances
- Reduction in Threshold Collision Impact Speeds
- Proven Accident Reduction

## MATERIAL BENEFITS

- High PSV Aggregates > 70
- Suitable for Concrete & Asphalt Surfaces
- Free of Solvent and Aromatic Oils
- Fuel, Oil & De-icing Salt Resistant
- Type 1 Compliance (TRL176 Appendix G, J & K)
- Guaranteed Product Performance
- Accredited Installation Service

# Leaders in Surfacing Solutions

**ANTI**SKID  
Industries PTY. LTD.



Highly effective for heavy use roundabouts



Reduction in threshold collision impact speeds



Proven accident reduction

### How does Surface Friction influence the reduction in vehicle braking distances and the impact threshold speed in the event of collision?

The concept of differing braking distances and reductions in threshold impact speeds in respect to higher surface friction has been developed from the following formulas:


$$d = V^2 / (254 * \mu) \quad \& \quad S = \sqrt{254 * d * \mu}$$

These formulas are used by many agencies around the world.

The outcome identifies that a vehicle braking on a surface with a higher level of friction will decelerate more quickly and come to a stop in a much shorter distance relevant to the speed of the vehicle.

Accordingly it is important to note that the 2nd vehicle would still be travelling at 42 km/h after the first 18 m of braking at which time comparatively, the first vehicle would have already come to a complete stop.

It is important to also consider that the braking distances do not account for the drivers reaction time as this can be variable based on the drivers ability and concentration level. However, proven technology and physics demonstrate that the higher the friction level the quicker the vehicle is likely to decelerate which in turn translates to shorter braking distances and overall accident reduction.

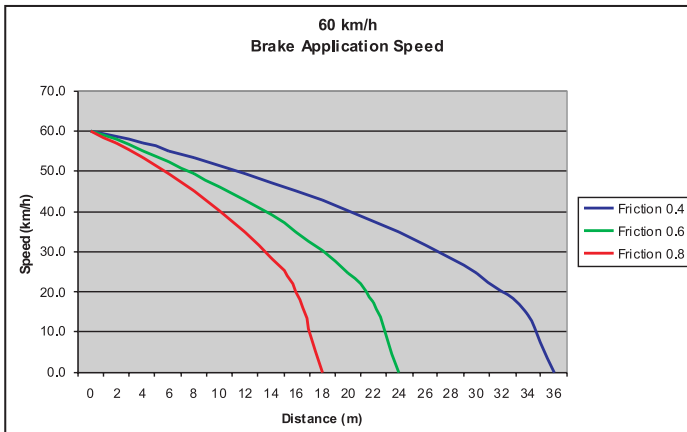

Based on the above formulae the graph depicts a vehicle braking from 60 km/h on a surface with an average friction level of 0.8, will come to a stop in approximately 18 m. Subsequently when this is compared against a 2nd vehicle travelling at the same speed on a surface with a friction level of 0.4, this second vehicle will take approximately 35 m, being an additional 17 m, before it comes to a complete stop.

### COLOUR RANGE



Buff Calcined Bauxite (PSV > 70)



Grey Calcined Bauxite (PSV > 70)

This information is furnished without warranty, representation, inducement, or license of any kind, except that it is an accurate visual representation of the type of surfacing finish achievable using Antiskid Industries Pty Ltd products. All written information is accurate to the best of Antiskid Industries Pty Ltd's knowledge or has been obtained from sources believed by Antiskid Industries Pty Ltd to be accurate and hence Antiskid Industries Pty Ltd does not assume any legal responsibility for use or reliance upon same. Customers are encouraged to conduct their own tests and obtain data from sources, which they know to be reliable before using any product. Please note that colours may vary between printed sample and final product.